





SECONDARY WIRES


Yel/Wht - 24 Vac


Yel - Comm




TR100VA005

 $Transformer\,96\,VA,\,480/277/240/120\,to\,24\,Vac,\,Circuit\,Breaker,\,Foot\,and\,Single\,Threaded\,Hub\,Mount\,Aller and\,Aller and Aller and\,Aller and Aller and\,Aller and Aller and Aller$

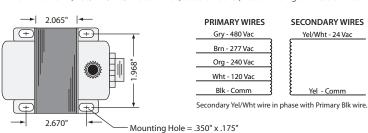













SPECIFICATIONS

VA Rating: 96 Frequency: 50/60 Hz

Mounting: Foot & Single Threaded Hub

Over Current Protection: Circuit Breaker

Dimensions: 4.258" x 2.510" x 3.030" (w/ .500" NPT Hub) Wire Length: 8"Typical w/.5" Strip

Operating Temperature: -30 to 140° F
MTBF: 100,000 Hours @ 77° F

Construction: Split-Bobbin

Approvals: Class 2 UL5085-3 Listed, C-UL, CE, RoHS